



Date: \_\_\_\_\_ Driver: \_\_\_\_\_  
 Event: \_\_\_\_\_ Car: \_\_\_\_\_  
 Track: \_\_\_\_\_ Weight: \_\_\_\_\_

# STANDARD SETUP SHEET




## TRACK CONDITIONS

Surface:  Smooth  Med.  Bumpy  
 Size:  Open  Med.  Tight  
 Traction:  High  Med.  Low

Track Temp/Air Temp: \_\_\_\_\_° / \_\_\_\_\_°  
 Note: \_\_\_\_\_  
 \_\_\_\_\_

## FRONT SUSPENSION



Front Width: 199 mm

Anti-Roll Bar: 90 °

Diff. Fluid: \_\_\_\_\_ wt  
 One Way  
 Solid Axle

Toe Angle: +1 °

Front Camber: L 2° R 2°

Front Ride Height: 5 mm

Front Droop: 2 mm

Caster: 2 mm

### ► SHOCK

Shock Length: 64 mm

Thread Length: 5.5 mm

Oil: #60 wt

Piston: Standard

Spring: Standard mm





### ► TIRE

Front Tire: \_\_\_\_\_


Shore: L 40° R 40°

Diameter(Start): L/R 62/62 mm

Diameter(Finish): L/R \_\_\_/\_\_\_ mm



## REAR SUSPENSION



Rear Width: 200 mm

Anti-Roll Bar: 0 °

Diff. Fluid: #10000 wt  
 Solid Axle

Toe Angle: -2.5 °

Rear Camber: L 4° R 4°

Rear Ride Height: 5.5 mm

Rear Droop: 3 mm

### ► SHOCK

Shock Length: 64 mm

Thread Length: 4 mm

Oil: #60 wt

Piston: Standard

Spring: Standard mm



### ► TIRE

Front Tire: \_\_\_\_\_


Shore: L 40° R 40°

Diameter(Start): L/R 63/63 mm

Diameter(Finish): L/R \_\_\_/\_\_\_ mm



## Pulley

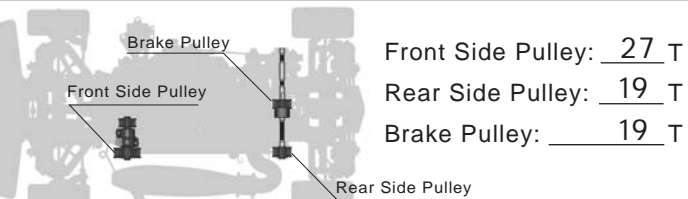


Front Side Pulley: 27 T

Rear Side Pulley: 19 T

Brake Pulley: 19 T

## ENGINE



Gear Ratio: 1st 19 T / 51 T

2nd 24 T / 46 T

Clutch Set Type:

3 Shoe  Push Type

Clutch Spring: 1.6 mm

Clutch weight: Standard

Clutch Shoe: Standard

Engine: Novarossi 12 L5

Plug: \_\_\_\_\_

Fuel: \_\_\_\_\_


Manifold: K Factory K6001

Pipe: K Factory K6001

Pipe Length: \_\_\_\_\_ mm

Note: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

## Body

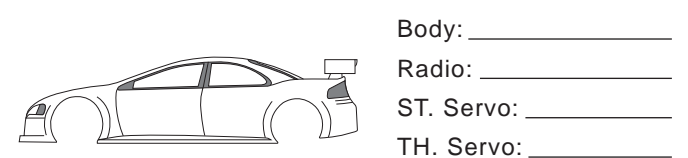

Body: \_\_\_\_\_

Radio: \_\_\_\_\_

ST. Servo: \_\_\_\_\_

TH. Servo: \_\_\_\_\_

## COMMENTS

Race Time / Lap: \_\_\_\_\_

Best Lap Time: \_\_\_\_\_

Position: \_\_\_\_\_

Notes: \_\_\_\_\_  
 \_\_\_\_\_